




PLAST-PACK

5.0L 180 LT

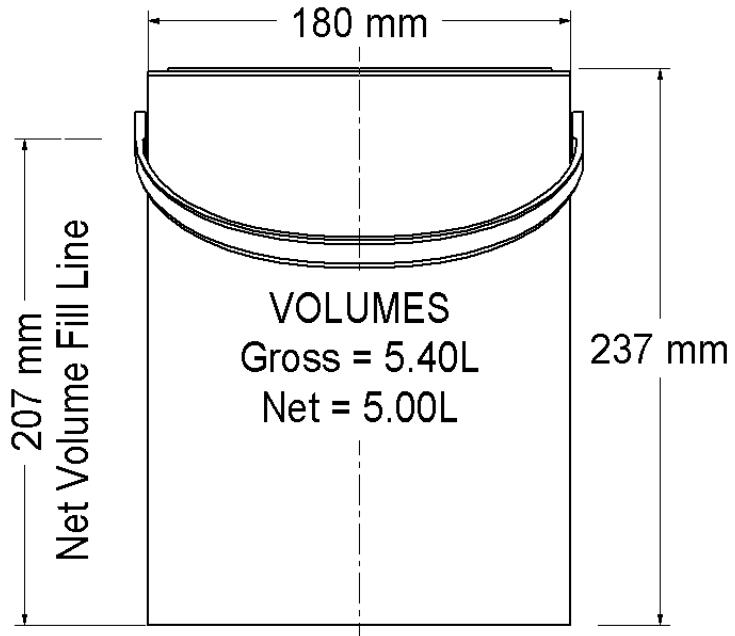

SPECIFICATION

LID

HANDLE TYPE

MATERIAL

COLOUR

WEIGHT

QUANTITY (Empty)

180 U Lid (Gasket Seal available for products with lower viscosity than Emulsion)
Plastic

Polypropylene Co-Polymer Food Grade

White – Contact Clear available on request

Container 239 (+/- 10g) Lid 36g (+/-4g)

Containers 180 per pallet (plt 1000mm x 1200mm)

Lids 2112 per pallet (2 boxes)

STACKING (Empty)

Containers: 5 pallets high (weight per plt 64 kgs)
Lids in Boxes: 3 pallets high

FILLING

(Based on Product Density 1.4,
Air Temperature 20 °C)

72 Per Pallet (36 per layer x 2 high)

640 mm Maximum Pallet Height

See accompanying page for Filled Container Specification
RPC strongly recommend that Stacking Trials be conducted using the appropriate
Product under Normal conditions

FILL TEMPERATURE

Max 70°C (avoid prolonged exposure over 40 °C & below 0 °C)

DECORATION

Off-Set Printing in up to 6 cols

In Mould & Post Mould Label Options Available

Key Lines Available on Request

*WE RECOMMEND THAT YOU CONSULT OUR DECORATION
ADVISORY SERVICE BEFORE BRIEFING YOUR DESIGNER*

COMPATABILITY



It is the responsibility of our customers to ensure their product is compatible with the container. Trials can be carried out by RPC on request.

Notes: Details given in this Data Sheet are correct at time of going to press. Further details can be found on the General Information Sheet. However for applications where these are critical please consult our Technical Staff.

RPC CONTAINERS LTD


FILLED CONTAINER

RECOMMENDED STACKING PATTERN

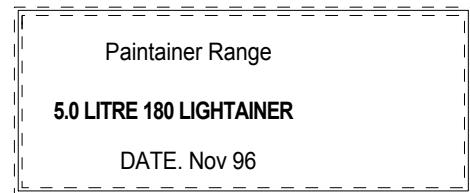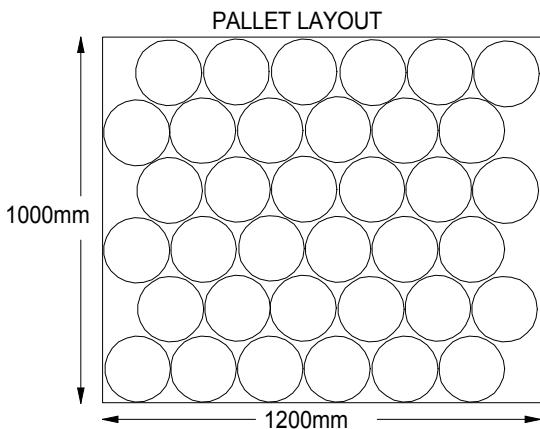

STACKABILITY

All Data given assumes a Product Density of 1.4 and an Air Temperature of 20°C. The Maximum height of Pallets holding filled Lightainers is 2. Use a Layer Pad between each Layer of Lightainers. It is Recommended that Pallets of Filled Lightainers should be Banded, Shrink Wrapped or Stretch Wrapped with a 10mm Spreader Board over the top layer, it is also recommended that the Shrink Wrap or Stretch Wrapping is securely located around the four sides of the Pallet.

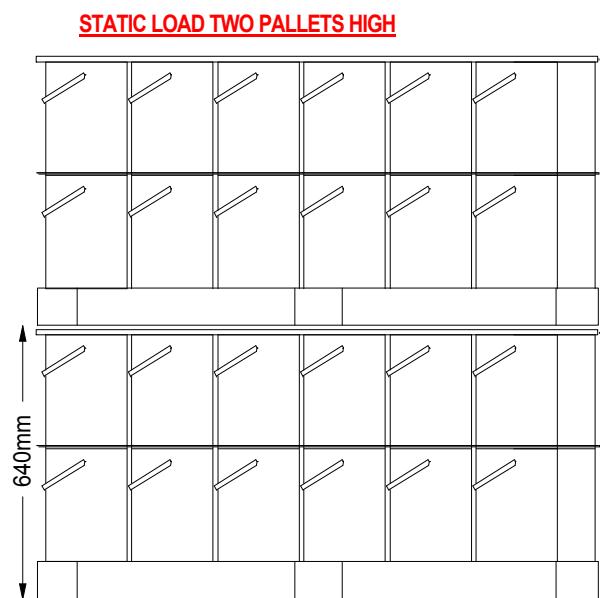

TEMPERATURE

Filling temperature: Polypropylene 70°C Max.
NB: Stacking performance is affected by temperature therefore do not Lid and Stack until product has cooled.
Avoid prolonged exposure over 40°C and below 0°C.

N.B. RPC Recommend that Stacking Trials are conducted using the appropriate Product. Under normal conditions.

For all other details related to our products please refer to the RPC Publicity Brochure or our Technical Staff.

FIL5180L